535,461

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



I TROME BURKERA IN BURKER MUKE BOMI BOMI BURK A HA HA BAHA BURKA MUKA MUKA MUKA BURK BURKERA BAHAN MERUPU KADA

(43) International Publication Date 10 June 2004 (10.06.2004)

PCT

(10) International Publication Number WO 2004/049320 A1

- (51) International Patent Classification7: G11B 7/085, 7/09
- (21) International Application Number:

PCT/IB2003/004916

- (22) International Filing Date: 29 October 2003 (29.10.2003)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

02079948.2


22 November 2002 (22.11.2002)

- (71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ROSMALEN, Gerard, E. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

- (74) Agent: SCHRIJNEMAEKERS, Hubert, J., M.; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PIVOTING OPTICAL DEVICE

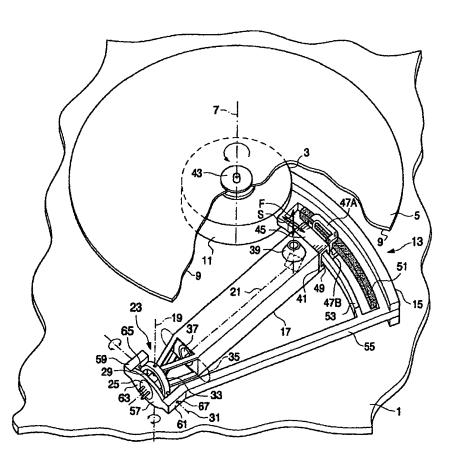

(57) Abstract: Pivoting optical device comprising a first part (15) and a second part (17) with optical means which is pivotally movable relative to the first part about a first pivot axis (19). said optical means defining an optical laser beam path (21) in the general longitudinal direction of the second part, and further comprising bearing means (23) comprising the first pivot axis and a point laser source (25) fixedly connected to the first part for providing a laser beam in the general direction of said second part. According to the invention, the laser source is located in said optical laser beam path in the general longitudinal direction of the second part, and the bearing means present an open center region (29) so that a laser beam is allowed to pass from the laser source to the second pivotally movable part.